

# HINO

## 300 Series

# TIPPER RANGE



\*Image may contain items not standard to the model

## KEY FEATURES

Pre-Collision System (PCS) including AEB & PD  
 Vehicle Stability Control (VSC) including ABS & TC  
 Lane Departure Warning System (LDWS)  
 Daytime Running Lamps (DRL)  
 Dual SRS Airbags  
 Reverse Camera  
 ECE R-29 Cab Strength Certified  
 Cruise Control  
 ADR 80/03 Emission level using Euro 5 Standard  
 Factory Tipper bodies with drop sides  
 STD Cab, Wide & Crew Cab variants

## KEY SPECIFICATIONS

GVM		4,495 to 8,500 kg
GCM		GVM + 3,500kg Automatic limited to 8,000kg
Power range		150hp to 165hp
Torque range		420Nm to 464Nm
Transmissions	STD cab	5 spd Manual & 6 spd Automatic
	Wide cab	6 spd Manual & 6 spd Automatic
Wheelbases		2.5m to 4.2m
Internal body length		3.0m to 4.0m

A Toyota Group Company



**MODEL DETAILS**






**MODEL DETAILS**

Model Description	616 AT 2525 STD TIPPER	616 MT 2525 STD TIPPER	616 AT 2810 WIDE TIPPER	617 MT 2810 WIDE TIPPER	716 AT 3430 WIDE TIPPER	717 MT 3430 WIDE TIPPER	917 MT 3430 WIDE TIPPER	717 MT 4200 CREW WIDE TIPPER	816 AT 4200 WIDE CREW TIPPER	917 MT 4200 WIDE CREW TIPPER
Product Code	XZU605R-WKTMSQ3 T	XZU605R-WKMMSQ3 T	XZU700R-WKTMSQ3 T	XZU700R-WKFMTQ3 T	XZU710R-WKTQSQ3 T	XZU710R-WKFQTQ3 T	XZU710R-WKFTTQ3 T	XZU730R-ZKFQTQ3 T	XZU730R-ZKTSSQ3 T	XZU730R-ZKFTTQ3 T
Engine speed @ 100 Km/h	2,230rpm	2,500rpm	2165rpm	2,128rpm	2,246rpm	2213rpm	2,458rpm	2,213rpm	2,525rpm	2,458rpm
Max theoretical speed	139km/h	124km/h	143km/h	145km/h	138km/h	140km/h	126km/h	140km/h	122km/h	126km/h
Engine Power & Torque (hp & Nm)	150hp / 420Nm			165hp / 464Nm	150hp / 420Nm	165hp / 464Nm			150hp / 420Nm	165hp / 464Nm
Transmission type & number of forward gears	Automatic 6 speed	Manual 5 speed	Automatic 6 speed	Manual 6 speed	Automatic 6 speed	Manual 6 speed	Manual 6 speed		Automatic 6 speed	Manual 6 speed
Fuel Tank Capacity	80 L		100 L		150 L			100 L		
Wheels & Tyres	185/85R16		195/85R16		215/85R16		225/80R17.5	215/85/R16	225/80R17.5	
Seating capacity	3				3			7		

<b>TIPPER BODY</b>										
Cubic Capacity	1.9m³		2.1m³		3.0m³			3.2m³		3.4m³
Internal length (mm)	3,000		3,100		3,600			3,800		4,000
Internal width (mm)	1,750		1,900		2,000			2,000		
Drop sides & tailgate height (mm)	370				430					
Deck plate thickness (mm)	3.2				3.2		4.5	3.2		4.5
Front plate thickness (mm)	3.2				2.3		3.2	2.3		3.2
Drop sides & Tailgate thickness (mm)	2.3				2.3		3.2	3.2		
Tipping angle (deg)	60°				55°			50°		
Hydraulic cylinder bore & stroke (mm)	100 x 350				100 x 480			100 x 510		
Hydraulic pump model	VC02-04	VC02-03	VC02-06		VC03-15					
Control	Lever in the cab				Leaver in the cab					
Tailgate operation	Hinged from top and bottom, auto release from bottom				Hinged from top and bottom, auto release from bottom			2 way gates hinged from the top and sides, auto release from the bottom		

<b>DIMENSIONS - (mm) / WEIGHTS - (kg)</b>										
Wheelbase (WB)	2,525		2,810		3,430		3,430		4,200	
Overall length (OL)	4,760		5,115		5,870		5,870		6,975	7,025
Overall width (OW)	1,880		1,995		2,130		2,130		2,190	
Cab width	1,695		1,995		1,995		1,995		1,995	
Overall height (OH)	2,100		2,190		2,230		2,230		2,230	2,250
Front Overhang (FOH)	980		1,115		1,115		1,115		1,115	
Road Clearance (RC)	170		170		185		200		180	200
Front Track (FT)	1,400		1,665		1,665		1,655		1,655	
Rear Track (RT)	1,435		1,480		1,520		1,590		1,590	
Turning circle	Kerb to Kerb	9,600		9,800		11,400		12,400		13,800
	Wall to Wall	10,800		11,200		12,800		13,800		15,200

Indicative chassis mass - kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)					Indicative chassis mass - kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)															
Total	2,795		2,755		3,100		3,070		3,555		3,520		3,705		3,815		3,915		4,030	
Front	1,520		1,495		1,765		1,745		1,915		1,890		1,905		1,995		2,020		1,980	
Rear	1,275		1,260		1,335		1,325		1,640		1,630		1,800		1,820		1,895		2,050	
Standard Ratings	GVM	4,495kg				6,500kg			7,995kg		6,500kg		8,000		7,995					
	GCM	7,995kg				8,000kg		10,000kg		11,495kg		10,000kg		8,000		11,495				
Optional Ratings	GVM	5,500kg				4,495kg			8,500kg		4,495kg		4,495		8,500					
	GCM	8,000kg		9,000kg		8,000kg		9,000kg		7,995kg		12,000kg		7,995		12,000				

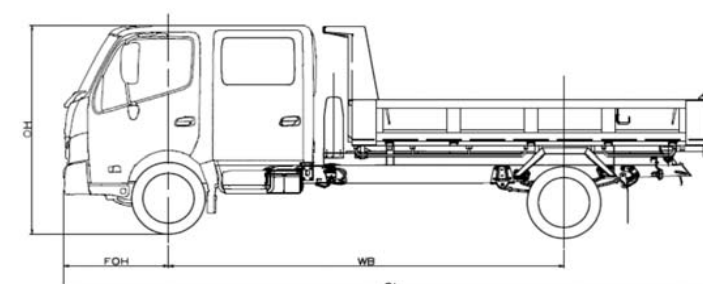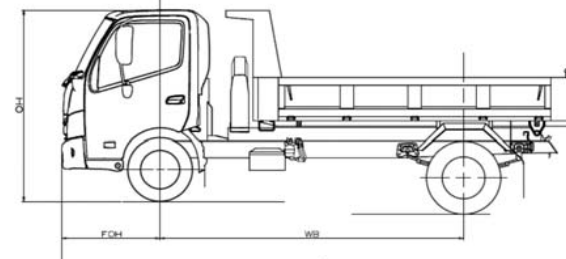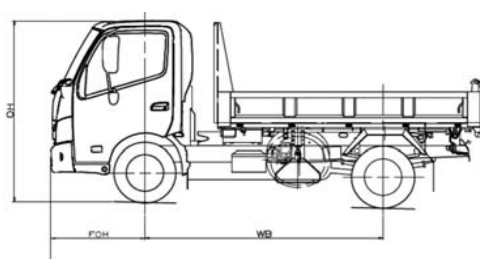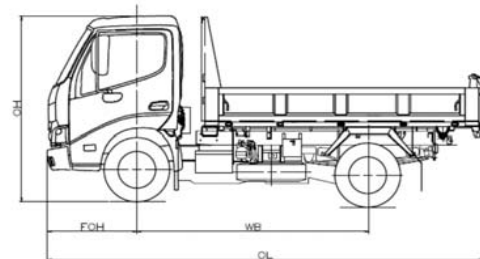

Drawings are for reference only to the dimensions table above them.  
For specific layouts please refer to the applicable Body Mounting Manual. (BMM)

Drawings are for reference only to the dimensions table above them.  
For specific layouts please refer to the applicable Body Mounting Manual. (BMM)



## SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brake System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
Traction Control	TC	Equipped
Lane Departure Warning System	LDWS	Equipped
Reverse Camera	RC	Equipped
ES Start (MT models only)	ES	Equipped
Daytime Running Lamps	DRL	Equipped
Reverse Buzzer		Equipped
Passive Safety Features		
ECE-R29 Cab Strength Certification		Equipped
SRS airbags for driver & side passenger		Equipped
SRS seatbelt pretensioner for driver & side passenger		Equipped
Shock absorbing & collapsible steering column		Equipped
Door Beams (anti side intrusion)		Equipped

## TIPPER BODY FEATURES

All steel construction with underbody hoist
Auto release tail gate
Drop sides & tail gate
Body lock, rope rails & side hinged tail gates (Crew cab models)

## GENUINE ACCESSORY OPTIONS

Bullbar or Nudge bar
Chrome wheel covers
Cameras (up to additional 3 extra)
Dash mat
Floor mats
Truck spec GPS navigation with live traffic
Seat covers (Wool, Canvas, Carbon)
Stone guard
Weathershields
Retracting Tarp

Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

## WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	3 years or 100,000km	36 months

Battery warranty – 12 months from date of delivery

\* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer \*



## DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability.

HSMY20BTGTIPPERRANGE-0920

A Toyota Group Company



Safer Greener Essential